


GordonRay® BH

The Economical Unitary Infrared Heater




- Longer life provided by durable components
- Clean, quiet draft-free comfort
- Easy serviceability provided through hinged door design
- Design flexibility achieved with multiple configurations including both L - and U-tube options and a broad range of burner sizes and tube lengths



Quality in Any Language™



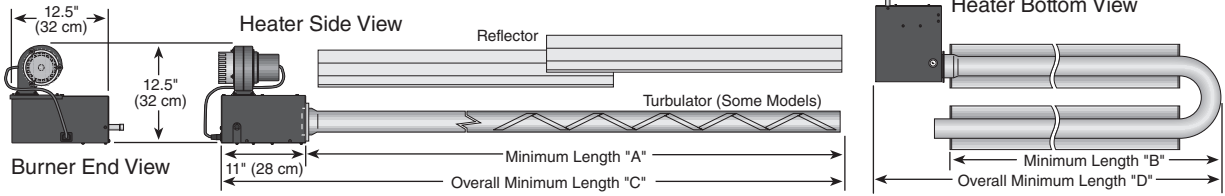

GORDONRAY® BH

Model		BH-40	BH-60	BH-80	BH-100	BH-115	BH-125	BH-140	BH-150	BH-175	BH-200
Minimum Length of Straight Tube*	[ft, in] A	10	20	20	30	30	40	40	50	50	60
Minimum Length of U-Tube*	[ft, in] B	N/A	11, 7	11, 7	16, 7	16, 7	21, 7	21, 7	26, 7	26, 7	31, 7
Overall Minimum Length of Straight Tube*	[ft, in] C	10, 11	20, 11	20, 11	30, 11	30, 11	40, 11	40, 11	50, 11	50, 11	60, 11
Overall Minimum Length of U-Tube*	[ft, in] D	N/A	12, 6	12, 6	17, 6	17, 6	22, 6	22, 6	27, 6	27, 6	32, 6

*For additional lengths, please see the current Installation, Operation and Service Manual.

Input (Btu/h) x (1000)		40	60	80	100	115	125	140	150	175	200
Inlet Pressure	[in wc] NG min.	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	5	5
	LPG Propane min.	11	11	11	11	11	11	11	11	11	11
	NG & LPG Propane max.	14	14	14	14	14	14	14	14	14	14
Gas Connection	NPT	½"	½"	½"	½"	½"	½"	¾"	¾"	¾"	¾"

Weights		10	20	30	40	50	60	70	80		
Overall Length of Tube and Accessory Packages	[ft]	10	20	30	40	50	60	70	80		
Hot Rolled or Aluminized Tube with Aluminum Reflector	[lb]	52	86	120	161	206	240	281	322		
Aluminized Tube with Stainless Steel Reflector	[lb]	66	113	152	208	265	304	360	416		
Burner	[lb]	29									
Aluminized U-Tube with Aluminum End Caps	[lb]	19									
Aluminized U-Tube with Stainless Steel End Caps	[lb]	20									
Fuel		NG or LPG Propane									
Electrical Supply		120 V, 60 Hz, 1 A									
Heat Exchanger Tubing		10 ft Sections, 4" dia, 16 Gauge, First 10 ft ALUMI-THERM® Steel Tubing [Remaining Hot Rolled, Heat Treated Aluminized or Double Porcelain Coated Steel Tubing]									
Exhaust Flue	dia	4"									
Reflector and End Caps		.024 Aluminum [Optional - .024 Stainless Steel Type 304]									
Control System		Fully Automatic, Three-Try, 100% Shut-Off, Direct Spark Electronic Ignition Control									
Approved As		Indoor (Vented or Unvented)									
Certification		ANSI Z83.20/CSA 2.34, 2.17, 2.20									
Warranty		Three-Year Limited (Refer to Installation, Operation and Service Manual for Details)									

Clearances to Combustibles **[in]

Model		BH-40		BH-60		BH-80		BH-100		BH-115/125		BH-140/150		BH-175/200	
Horizontal	45°	Horiz.	45°	Horiz.	45°	Horiz.	45°	Horiz.	45°	Horiz.	45°	Horiz.	45°	Horiz.	45°
	A	6	8	6	8	6	8	6	10	6	10	6	12	8	12
	B	27	8	35	8	38	8	40	8	46	8	50	8	52	8
	C	52	50	62	59	65	65	70	73	76	77	79	83	82	85
	D	27	46	35	54	38	60	40	64	46	69	50	74	52	79

**Clearances B, C and D can be reduced by 50% for locations 25 ft (7 m) or more downstream of the burner. For other mounting options and associated clearances, complete installation, operation and service criteria, please see the current issue of the Installation, Operation and Service Manual.

Installation Code and Annual Inspections:

All installations and service of ROBERTS GORDON® products must be performed by a contractor qualified in the installation and service of products sold and supplied by Roberts-Gordon and conform to all requirements set forth in the ROBERTS GORDON® manuals and all applicable governmental authorities pertaining to the installation, service and operation of the equipment. To help facilitate optimum performance and safety, Roberts-Gordon recommends that a qualified contractor annually inspect your ROBERTS GORDON® products and perform service where necessary, using only replacement parts sold and supplied by Roberts-Gordon.

Further Information: Applications, engineering and detailed guidance on systems design, installation and product performance is available through ROBERTS GORDON® representatives. Please contact us for any further information you may require, including the Installation, Operation and Service Manual.

This product is not for residential use.

This document is intended to assist licensed professionals in the exercise of their professional judgement.

Roberts-Gordon, LLC
 1250 William Street
 P.O. Box 44
 Buffalo, NY 14240-0044 USA
 Telephone: 716.852.4400
 Fax: 716.852.0854
 Toll Free: 800.828.7450
www.rg-inc.com

European Office:
 Roberts-Gordon Europe Limited
 Telephone: +44(0) 1902 494425
 Fax: +44(0) 1902 403200